


HB-5000-EH

ESCAPE HATCH, EXTERNAL A-60

HB-5000-GEH

GLAZED ESCAPE HATCH , EXTERNAL A-60

An escape hatch is basically a small door. The HB-5000 design is heavy duty, and give you av very durable hatch. With the large glazing you basically get an “escape window”.

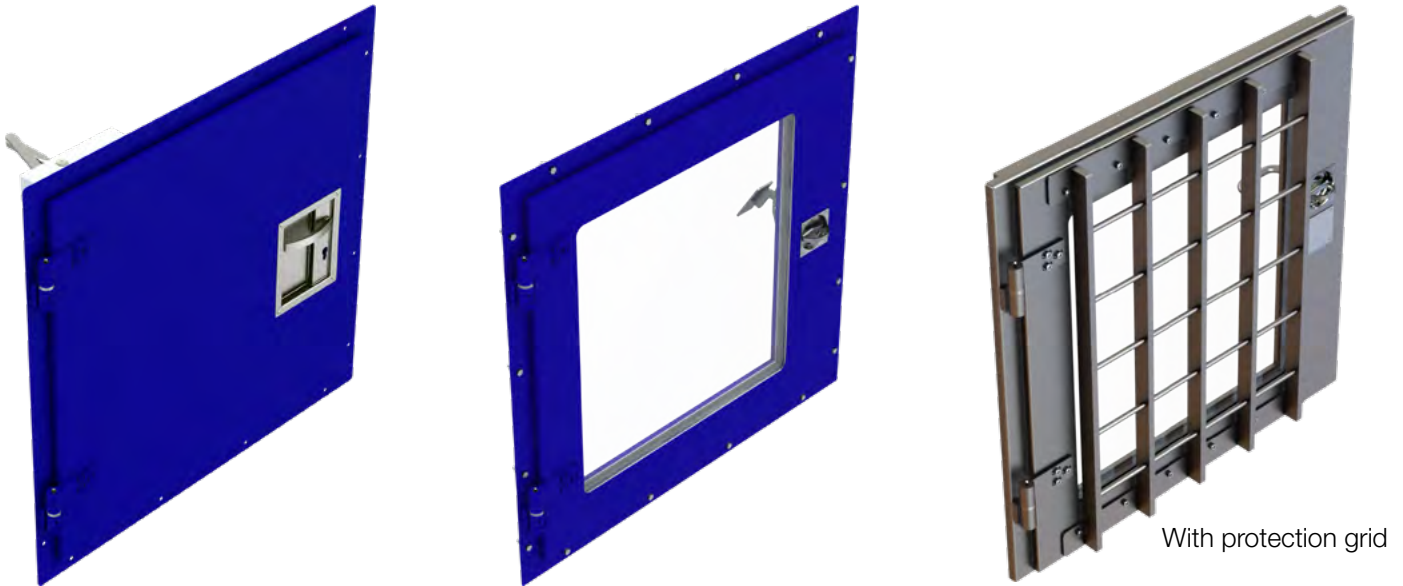

With protection grid

HB-H A-60 EH

ESCAPE HATCH A-60

HB-H A-60 is a good choice for containers etc. Where the need for weather tightening is not vital. HB-H A-60 can be delivered in a normal door frame or with “hollow square profile” frame as illustrated here.



Description	HB-5000-H	HB-5000-GH	HB-H A-60 H
Fire Class	A-60	A-60	
Door leaf	2 mm stainless steel	2 mm stainless steel	1.5 mm mild steel or stainless steel.
Frame	3 mm stainless steel	3 mm stainless steel	3 mm painted mild steel or stainless steel.
Finish	STANDARD finish: Powder coated in accordance with Baggerød paint procedure (Acid wash and Wet paint can be supplied)		
Thickness of door leaf	64mm	64mm	63 mm
Hinges	2 x HB5000	2 x HB5000	2 x HB-H
Gasket	Adjustable (No gasket or vulcanized gasket=option)	Adjustable (No gasket or vulcanized gasket=option)	Adjustable or fixed (No gasket or vulcanized gasket=option)
Sound reduction	44 dB (with gaskets)	44 dB (with gaskets)	RW = 40 dB (with gaskets)
Air and gas tightness	0,4 m³/nm² at 50 Pa (with gaskets)	0,4 m³/nm² at 50 Pa (with gaskets)	0.2 m3/hm2 at 50 Pa (with gaskets)
Application	External	External	Internal/external












CONFIGURATION OF HB-5000 / HB-H A-60 ESCAPE HATCHES

BASIC DOOR PARTS


	18001	Gasket for frame/thresh. Material: Fire retardant silicon 20x14
	18002	Gasket for door-leaf Material: Fire retardant silicon 30x18
	26111 RH 26112 LH	Hinge for bolted doors. HB-5000
	26113 RH 26114 LH	Hinge for welded doors. HB-5000
	26000	Hinge HB-H A-60 Material: SS
		Installation gasket, bolts for frame, bolts for hinges, washers and shims

STANDARD HARDWARE

DOOR HANDLE WITH ESCUTCHEON/PLATE

	40111	Flush mounted handle/ ring
	40135	Handle with long escutcheon. 8mm. Blind
	40135-1	Handle with long escutcheon. 8mm. Oval
	40135-3	Handle with long escutcheon. 8mm. Continental
	40126	Handle with blind escutcheon
	40122(RH) 40123(LH)	Handle with escutcheon for continental cylinder
	40124(RH)/ 40125(LH)	Handle with escutcheon, oval cylinder
	42116	Blind plate for no handle
	40104 (b) 40104-1(O) 40104-2(C)	Recessed handle
	59222	Panic bar/device
	40234	Push-pad

DOOR CLOSER

	40338	Door closer TS83 EN 3-6 Material: Mix
---	-------	---

WINDOW/VISION PANEL (OPTION)





Vision panel 828x878mm
Pilkington Pyrostop® Type 60-201
For external application (meets 60
minutes insulation and integrity).




Protection grid

LOCK-CASES FOR TWO DOORHANDLES



	40054-5/ 40055-5	Main/centre Lock case Material: SS 1951
	40092RH 40093LH	Lock case, heavy doors 5392/9 Material: SS 9mm spindle

LOCK-CASES FOR PANIC-BAR


	40050-5/ 40051-5	Main/centre lock case with key override for panic-bar Material: SS 1953
--	---------------------	--

LOCK CYLINDERS HB-5000

Continental key/thumb-turn cylinder for key on one side,
and thumb-turn on the other side.

	40068	Key/Thumb-t. Cylinder 49+39mm
Continental key cylinder for key on one side.		
	40062	Key Cylinder 5506, 49mm

LOCK CYLINDERS HB-H A-60

	40065	Key/thumb-t. cylinder 39+39mm. Continental
	40059	Key cylinder 39mm. Continental



Office/factory address: Horten Industripark, Nedre vei 8, Building 30C, 3183 Horten, Norway
Post address: Post address: Post box 155, NO-3192 - Horten, Norway
Telephone: +47 33 03 56 80
E-mail: sales@baggerod.no
Website: www.baggerod.no