

W-02 / W-03 FIRE RATED WINDOWS


FIRE RATED WINDOWS FOR MARITIME ENVIRONMENTS

As a leading manufacturer of Fire Rated Windows, Baggerød windows provide the best protection against fire, water, heat and noise. Baggerød windows are available in fire class: A-0, A-60, H-60 and H-120*. The products comply with IMO, Solas and NORSOK requirements.


Office/factory address: Horten Industripark, Nedre vei 8, Building 30C, 3183 Horten, Norway
 Post address: Post address: Post box 155, NO-3192 - Horten, Norway
 Telephone: +47 33 03 56 80
 E-mail: sales@baggerod.no
 Website: www.baggerod.no
 Enterprise no: NO 983 493 653

Baggerød windows offer:

- High quality
- Solid construction
- High sound reduction
- Adaptable installation possibility
- Quick installation
- Sealed condensation free glass
- Replaceable glass from internal side
- Industry approved design
- Options for blinding against sun and reflections
- Delivery fully assembled or for assembly at site

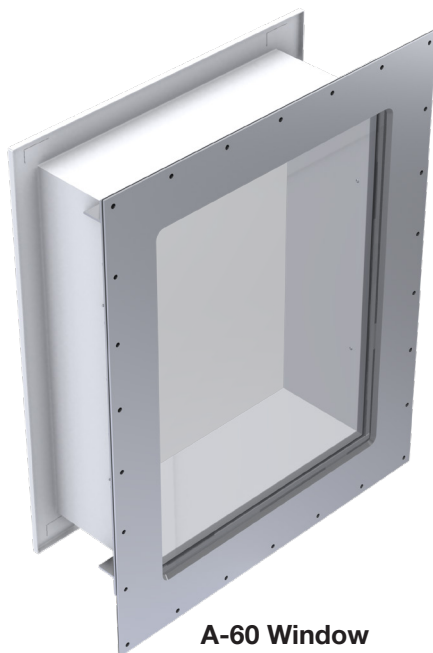

A-60 Window
with internal frame.

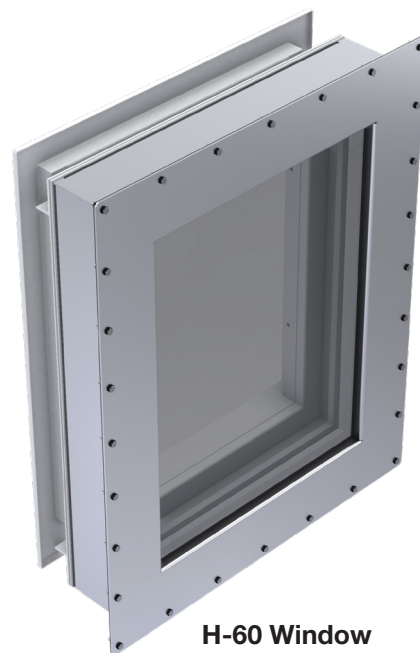


H-60 Window
with internal frame.



Description	W-02-C A-60 Window	W-02-H A-60 Window	W-03-C H-60 Window	H-120 Window
Fire Class	A-0 / A-60	A-0 / A-60	H-60	H-120* *Supplied by IMS Technologies.
Max. glazing size:	1200x1900 mm (WxH)	2100x1800 mm (WxH)	1360x1360 mm (WxH)	More information on request.
Fire Glass	Contraflam	Hero Fire	Contraflam Marine H120	
Material	4mm frame/5mm fixing frame/2mm internal frame. Mild steel or Stainless steel	4mm frame/5mm fixing frame/2mm internal frame. Mild steel or Stainless steel	4mm frame/4mm fixing frame/2mm internal frame. Mild steel or Stainless steel	
Fixing to bulkhead	Bolted or Welded	Bolted or Welded	Bolted or Welded	
Finish	Powder coated or Polyurethane Coating.	Powder coated or Polyurethane Coating.	Powder coated or Polyurethane Coating.	
Sound reduction	Rw 48 - 62 dB	Rw 48 - 62 dB	Rw 48 - 62 dB	

CONFIGURATION OF WINDOWS




BASIC PARTS

	31007*	Installation kit for bolted windows. *Larger windows: custom kit
	18108	Gasket
	18007	Gasket
	20201(3mm) 20202(5mm)	Fiberfrax, isolation material
	20303	Promatect H, isolation mat.
	10003331	Dow corning 791 silicone weatherproofing sealant
	70008 (BL)	FireStop Sealant 3000

FIRE GLASS


	HeroFire A-60 Glass unit Contraflam A-60 Glass unit
	Contraflam H-120 (H-60) Glass unit

OPTIONS


	Internal frame (lining) cassettes (integrated roller blind, option)
	Internal frame (lining) cassettes with sound reduction glass (integrated roller blind, option).
	Manual roller blind
	Electric roller blinds
	Sun-protection
	Blackout
	Venetian Blinds
	Electric heating (only Contraflam glass)
	ClearShield chemical glass protection treatment.

Fire rated Windows TECHNICAL DETAILS


BOLTED FRAME

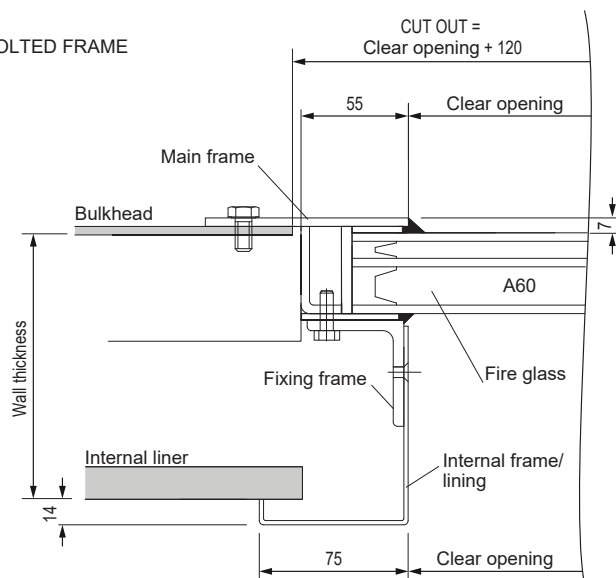

WELDED FRAME

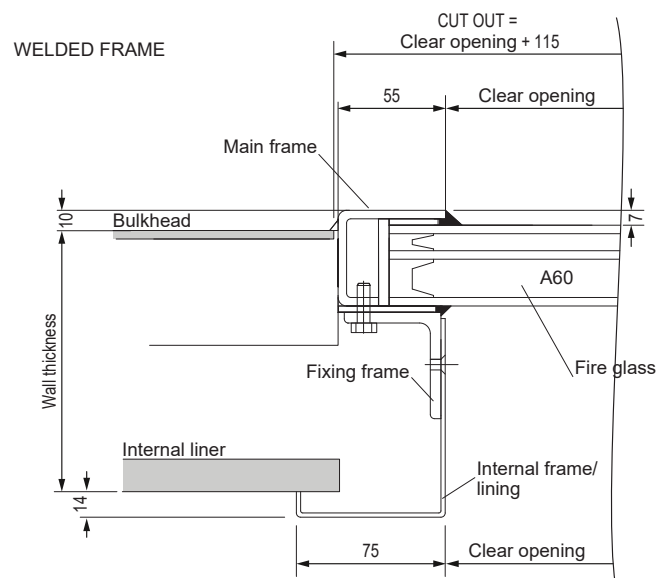

Welded frame designs:

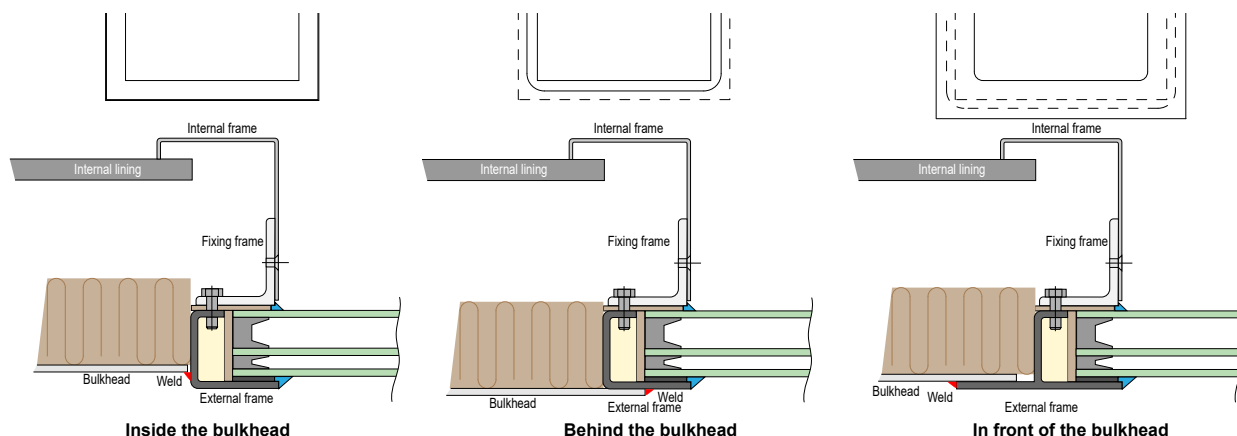

Inside the bulkhead

Behind the bulkhead

In front of the bulkhead